



INTRODUCING 2023 EDITION

X PULSE 4V
PRO 200 FOUR VALVE

NEW X PULSE 4V
200 FOUR VALVE



**MAKE
NEW
TRACKS**

HERO MOTOSPORTS TEAM RALLY

A FORCE TO RECKON WITH

37 RACES | 7 YEARS



SEBASTIAN BUHLER

JOAQUIM RODRIGUES

ROSS BRANCH

INTERNATIONAL RACE RESUME

- **1 WORLD CHAMPIONSHIP** - Baja World Cup 2020
- **4 RALLY WINS** - Baja Hungary '21, Baja Port '20, Baja India '17, Pan Africa '19
- **12 RALLY PODIUMS** - Abu Dhabi '21, Silkway '21, Baja Hungary '21, Baja Portalegre '20
- **14 STAGE WINS** - Abu Dhabi '23, Dakar '23, Morocco '22, Dakar '22
- **3 TOP 10 FINISHES** AT THE DAKAR
- **THE FIRST, AND ONLY INDIAN MANUFACTURER**
TO WIN MULTIPLE STAGES AT THE DAKAR RALLY



**FROM TEST TRACKS
TO PODIUM FINISHES**

37 RACES | 4 YEARS

NATIONAL RACE RESUME


- **4 NATIONAL CHAMPIONSHIPS** - INRSC 2022, INRSC 2021
- **10 RALLY WINS** - Desert Storm '22, Rally of Chamba '21, UDC '21
- **24 RALLY PODIUMS** - SJOBA '23, Desert Storm '22, Dakshin Dare '22
- **22 GROUP VICTORIES**
- **30 TOP 5 FINISHES**

KEY FEATURES

LIGHT UP EVERY ADVENTURE
New projector headlamps
with LED DRLs



CONQUER ALL TERRAINS
Multi-terrain 3-mode ABS

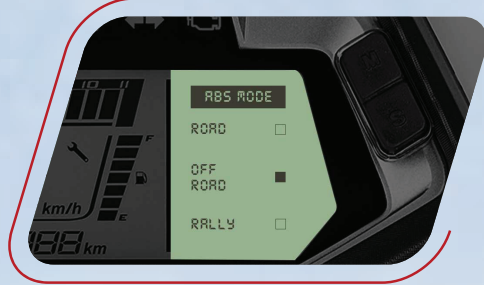

STYLED TO THRILL
Rally-style Windshield



MADE FOR ADVENTURE
Updated Ergonomics



SECONDARY FEATURES

**NEW KNUCKLE
GUARDS**



**UPDATED LUGGAGE
PLATE**



**UPDATED USB
CHARGER**



**NEW
SWITCHGEAR**




PRO VARIANT FEATURES

EXCLUSIVE RALLY
DNA GRAPHICS



HANDLEBAR RISER

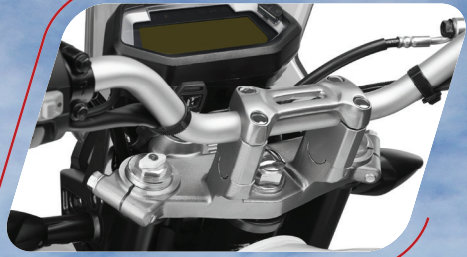

ADJUSTABLE
FRONT SUSPENSION OF 250MM



ADJUSTABLE
REAR SUSPENSION OF 220 MM



INCREASED GROUND
CLEARANCE OF 270 MM



EXTENDED GEAR LEVER



LONGER SIDE STAND



TALLER SEAT HEIGHT
OF 885 MM



SPECIFICATIONS

	ITEM	Pro Variant	Base variant
Dimensions	Overall length	2255	2222
	Overall width	862	862
	Overall height	1380	1320
	Wheelbase	1427	1410
	Seat Height	891	825
	Ground Clearance	270	220
	Kerb Weight (kg)	161 kg	159 kg
Frame	Frame type	Diamond type	Diamond type
	Front suspension	Cartridge type (dia 37mm) with adjustable compression & rebound damping	Telescopic Front Forks (dia 37) with anti friction bush
	Rear suspension	Rectangular swingarm with 10 step preload adjustable mono shock	Rectangular swingarm with 10 step preload adjustable mono shock
	Front tyre size	90/90-21 M/C 54S	90/90-21 M/C 54S
	Rear tyre size	120/80-18 M/C 62S	120/80-18 M/C 62S
	Front brake Disc type	Petal Disc Dia. 276 mm	Petal Disc Dia. 276 mm
	Rear brake Disc type	Petal Disc Dia. 220 mm	Petal Disc Dia. 220 mm
Engine	Fuel tank capacity	13.0 Litres	13.0 Litres
	Type	Oil cooled, 4 Stroke 4 Valve single cylinder OHC	Oil cooled, 4 Stroke 4 Valve single cylinder OHC
	Maximum power	14.1 kW/ 18.9 BHP @ 8500 RPM	14.1 kW/ 18.9 BHP @ 8500 RPM
	Maximum torque	17.35 Nm @ 6500 rpm	17.35 Nm @ 6500 rpm
	Bore and stroke	66.5mm X 57.5mm	66.5mm X 57.5mm
	Displacement	199.6cc	199.6cc
	Compression ratio	10.5:1	10.5:1
Drive train	Clutch system	Multi-plate, wet type	Multi-plate, wet type
	Transmission	5-speed constant mesh	5-speed constant mesh
	Starting	Self and Kick	Self and Kick
	Battery capacity	12V- 6 Ah, ETZ-7 *MF Battery	12V- 6 Ah, ETZ-7 *MF Battery
Lamps	Headlamp	LED (Class D with DRL)	LED (Class D with DRL)
	Tail light	LED	LED
	Instrument Cluster	Full digital LCD, with Bluetooth & Turn by Turn navigation	Full digital LCD, with Bluetooth & Turn by Turn navigation

AVAILABLE COLOURS



Matte Nexus Blue



Black Sports Red



Techno Blue



Rally Edition White (pro variant)

Pictures shown are for illustration purpose only and may not be exact representation of the product. It is our endeavour to constantly improve the product. This could lead to change in product specifications without any notice. Accessories & Feature shown may not be part of standard fitment. Actual colour of the vehicle may differ from those shown in the picture.

Hero MotoCorp Ltd. Regd. Office: The Grand Plaza, Plot No. 2, Nelson Mandela Road, Vasant Kunj - Phase -II, New Delhi - 110070, India.

CIN: L35911DL1984PLC017354 | PAN: AAACH0812J

Phone No.: 011-46044100, Fax No.: 011-26143198, 26143321. Toll Free No.: 1800-266-0018, Website: www.heromotocorp.com